

Accessories

Earphones	13.6
EP-820AS Single Earphone (TRS connector, Ring: NC).....	13.6
EP-822 Single Inner Earphone (TRS connector, Ring: NC).....	13.6
EP-829 Single Earphone (ear pads can be striped, TRS connector, Ring: NC).....	13.6
EP-829SW Single Earphone (ear pads can be striped, built-in magnetic control switch, TRS connector, Ring: NC)	13.6
EP-960AN Interpreter Headset with Microphone (TRRS plug, stereo, for HCS-8385/60, including a pair of EP-960HD Detachable Earshells).....	13.7
EP-960AH Interpreter Headset with Microphone (stereo, for HCS-4385U/50, including a pair of EP-960HD Detachable Earshells).....	13.7
EP-960BH Interpreter Headset (stereo, including a pair of EP-960HD Detachable Earshells).....	13.8
HCS-5100PA Headphone.....	13.8
Sponge Ear Pads for HCS-5100PA Sponge Ear Pads (thick, for new HCS-5100PA, 50 pairs/package).....	13.8
EP-960SP-L Sponge Ear Pads for EP-960 (Ø 70 mm, for EP-960AH/EP-960BH, 10 pairs/package).....	13.8
EP-960SP-S Sponge Ear Pads for EP-960 (Ø 58 mm, for EP-960AH/EP-960BH, 10 pairs/package).....	13.8
EP-960HD Detachable Earshells for EP-960 (for EP-960AH/EP-960BH, 1 pair).....	13.8
HCS-1020 Clip Microphone	13.9
Stem Microphones	13.10
MS16EGASG Stem Microphone (16 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, charcoal gray)	13.10
MS16EGASS Stem Microphone (16 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, silver).....	13.10
MS16EGASB Stem Microphone (16 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, black).....	13.10
MS27EGA1G Stem Microphone (27 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, charcoal gray)	13.11
MS27EGA1S Stem Microphone (27 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, silver).....	13.11
MS27EGA1B Stem Microphone (27 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, black).....	13.11
MS33EGA1G Stem Microphone (33 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, charcoal gray)	13.11
MS33EGA1S Stem Microphone (33 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, silver).....	13.11
MS33EGA1B Stem Microphone (33 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, black).....	13.11
MS41EGA1G Stem Microphone (41 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, charcoal gray)	13.11
MS41EGA1S Stem Microphone (41 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, silver).....	13.11
MS41EGA1B Stem Microphone (41 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, black).....	13.11
MS47EGA1G Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, charcoal gray)	13.11

MS47EGA1S	Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, silver).....	13.11
MS47EGA1B	Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, black).....	13.11
MS33EME1G	Stem Microphone (33 cm, with two-color illuminated ring and lockable windshield, for HCS-3900 series, charcoal gray).....	13.13
MS33EME1S	Stem Microphone (33 cm, with two-color illuminated ring and lockable windshield, for HCS-3900 series, silver).....	13.13
MS41EME1G	Stem Microphone (41 cm, with two-color illuminated ring and lockable windshield, for HCS-3900 series, charcoal gray).....	13.13
MS41EME1S	Stem Microphone (41 cm, with two-color illuminated ring and lockable windshield, for HCS-3900 series, silver).....	13.13
MS47EME1G	Stem Microphone (47 cm, with two-color illuminated ring and lockable windshield, for HCS-3900 series, charcoal gray).....	13.13
MS47EME1S	Stem Microphone (47 cm, with two-color illuminated ring and lockable windshield, for HCS-3900 series, silver).....	13.13
MS24EMF1G	Stem Microphone (24 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, charcoal gray).....	13.14
MS24EMF1S	Stem Microphone (24 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, silver).....	13.14
MS33EMF1G	Stem Microphone (33 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, charcoal gray).....	13.14
MS33EMF1S	Stem Microphone (33 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, silver).....	13.14
MS33EMF1B	Stem Microphone (33 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, black).....	13.14
MS41EMF1G	Stem Microphone (41 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, charcoal gray).....	13.14
MS41EMF1S	Stem Microphone (41 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, silver).....	13.14
MS41EMF1B	Stem Microphone (41 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, black).....	13.14
MS47EMF1G	Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, charcoal gray).....	13.14
MS47EMF1S	Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, silver).....	13.14
MS47EMF1B	Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, black).....	13.14
MS50EMF2B	Stem Microphone (50 cm, 2 flexible parts, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, black).....	13.16
MS60EMF2B	Stem Microphone (60 cm, 2 flexible parts, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, black).....	13.16
MS70EMF2B	Stem Microphone (70 cm, 2 flexible parts, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, black).....	13.16
MS33EMFSS	Stem Microphone (33 cm, flexible hose, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4385U/50, silver).....	13.17
M-model Lockable Windshield_G	M-model Lockable Windshield (optional, gray).....	13.17

M-model Lockable Windshield_B	M-model Lockable Windshield (optional, black).....	13.17
MIC-SK-V	Stem Microphone Fixing Base (tabletop).....	13.18
MIC-SK-H	Stem Microphone Fixing Base (suspension).....	13.18
Power Adapter		13.18
HCS-ADP5V	Power Adapter (5 V DC, 2.0 A, for HCS-1081/50).....	13.18
Cables and Connectors		13.19
CBL2SS-01	1 m 2-pin Cable (with two sockets).....	13.19
CBL2SS-01CMP	1 m 2-pin Cable (with two sockets, CMP).....	13.19
CBL4PK-01	1 m Power Adapter Cable (for device supplies power to HCS-8338, HCS-8348, HCS-8368).....	13.19
CBL4PK-01CMP	1 m Power Adapter Cable (for device supplies power to HCS-8338, HCS-8348, HCS-8368 CMP).....	13.19
CBL4PS-05CMP	5 m 4-pin Extension Cable (with a plug and a socket, CMP).....	13.19
CBL4PS-10CMP	10 m 4-pin Extension Cable (with a plug and a socket, CMP).....	13.19
CBL4PS-20CMP	20 m 4-pin Extension Cable (with a plug and a socket, CMP).....	13.19
CBL4PS-30CMP	30 m 4-pin Extension Cable (with a plug and a socket, CMP).....	13.19
CBL4PS-40CMP	40 m 4-pin Extension Cable (with a plug and a socket, CMP).....	13.19
CBL4PS-50CMP	50 m 4-pin Extension Cable (with a plug and a socket, CMP).....	13.19
CBL4C-CMP	Professional Extension Cable for Conference System (4-pin, 18AWGx4C, CMP).....	13.20
CBL4PT-02	2 m Power Branch Cable (for HCS-8338, HCS-8348 and HCS-8368 series Paperless Multi-media Congress Terminal).....	13.20
CBL4PT-02CMP	2 m Power Branch Cable (for HCS-8338, HCS-8348 and HCS-8368 series Paperless Multi-media Congress Terminal, CMP)....	13.20
CBL-XLR2DIN-01	1 m XLR to DIN Converting Cable (HCS-4340HDA/50P needed).....	13.20
S-UTP CABLE	Professional Extension Cable for Conference System.....	13.20
FTP CABLE	Professional Extension Cable for Conference System (CMP).....	13.20
CBL6PP-02	2 m 6-pin Extension Cable (with two plugs).....	13.21
CBL6PP-02CMP	2 m 6-pin Extension Cable (with two plugs, CMP).....	13.21
CBL6PS-01	1 m 6-pin Extension Cable (with a plug and a socket).....	13.21
CBL6PS-03	3 m 6-pin Extension Cable (with a plug and a socket).....	13.21
CBL6PS-05	5 m 6-pin Extension Cable (with a plug and a socket).....	13.21
CBL6PS-10	10 m 6-pin Extension Cable (with a plug and a socket).....	13.21
CBL6PS-20	20 m 6-pin Extension Cable (with a plug and a socket).....	13.21
CBL6PS-30	30 m 6-pin Extension Cable (with a plug and a socket).....	13.21
CBL6PS-40	40 m 6-pin Extension Cable (with a plug and a socket).....	13.21
CBL6PS-50	50 m 6-pin Extension Cable (with a plug and a socket).....	13.21
CBL6PS-03CMP	3 m 6-pin Extension Cable (with a plug and a socket, CMP).....	13.21
CBL6PS-05CMP	5 m 6-pin Extension Cable (with a plug and a socket, CMP).....	13.21
CBL6PS-10CMP	10 m 6-pin Extension Cable (with a plug and a socket, CMP).....	13.21
CBL6PS-20CMP	20 m 6-pin Extension Cable (with a plug and a socket, CMP).....	13.21
CBL6PS-30CMP	30 m 6-pin Extension Cable (with a plug and a socket, CMP).....	13.21

CBL6PS-40CMP	40 m 6-pin Extension Cable (with a plug and a socket, CMP).....	13.21
CBL6PS-50CMP	50 m 6-pin Extension Cable (with a plug and a socket, CMP).....	13.21
CBL5300-05	5 m Dedicated Transceiver Cable.....	13.22
CBL5300-10	10 m Dedicated Transceiver Cable.....	13.22
CBL5300-20	20 m Dedicated Transceiver Cable.....	13.22
CBL5300-30	30 m Dedicated Transceiver Cable.....	13.22
CBL5300-40	40 m Dedicated Transceiver Cable.....	13.22
CBL5300-50	50 m Dedicated Transceiver Cable.....	13.22
CBL5300-05CMP	5 m Dedicated Transceiver Cable (CMP).....	13.22
CBL5300-10CMP	10 m Dedicated Transceiver Cable (CMP).....	13.22
CBL5300-20CMP	20 m Dedicated Transceiver Cable (CMP).....	13.22
CBL5300-30CMP	30 m Dedicated Transceiver Cable (CMP).....	13.22
CBL5300-40CMP	40 m Dedicated Transceiver Cable (CMP).....	13.22
CBL5300-50CMP	50 m Dedicated Transceiver Cable (CMP).....	13.22
RG-59	Coaxial-cable (75 Ω) (unit: meter).....	13.22
RG-6/U	Coaxial-cable (75 Ω) (unit: meter).....	13.22
BNC Connector	BNC Connector (plug).....	13.22
HCS-4352T/50	6-pin Cable Splitter (1 input & 3 outputs, for HCS-4100/50 and HCS-8300 series).....	13.23
HCS-4353/06	6-pin Grounding Cable Connection Socket (for HCS-3900, HCS-4100/50 and HCS-8300 series).....	13.23
4P-DIN plug	Detachable 4P-DIN Standard Plug.....	13.23
4P-DIN socket	Solderable 4P-DIN Standard Socket (insulating).....	13.23
6P-DIN plug	Detachable 6P-DIN Standard Plug.....	13.24
6P-DIN socket	Solderable 6P-DIN Standard Socket (insulating).....	13.24
HCS-4345TK/50	Touched IC-Card Encoder (champagne panel + gray base).....	13.24

Multifunctional Storage Case..... 13.25

HCS-852KS	Multifunctional Storage Case (inner height 620 mm, free fit Foam Insert, holds up to 24 stem microphones in the case cover).....	13.25
HCS-852S-CMU	Foam Insert (for 1 pc main unit with 2U high + 20 m extension cable).....	13.25
HCS-852S-DStyle	Foam Insert (for 12 pcs HCS-4330/32 + 8 pcs stem microphones).....	13.26
HCS-852S-GStyle	Foam Insert (for 10 pcs HCS-4886/87/88 + 6 pcs stem microphones).....	13.26
HCS-852S-1U	Foam Insert (for 2 pcs units of 1U height and attached cables).....	13.27
HCS-852S-4338	Foam Insert (for 16 pcs HCS-4338/HCS-3938 + 10 pcs stem microphones + attached cables).....	13.27
HCS-852S-4385U	Foam Insert (for 6 pcs HCS-4385U/50 + 2 pcs stem microphones).....	13.28
HCS-852S-5100T	Foam Insert (for 1 pc HCS-5100T+ 2 pcs HCS-4385U/50).....	13.28
HCS-852S-5300CHG	Foam Insert (for 2 pcs HCS-5300CHG/08).....	13.29
HCS-852S-5300D	Foam Insert (for 8 pcs 5300 wireless conference units).....	13.29
HCS-852S-5300TD	Foam Insert (for 1 pc HCS-5300CHG/08 + 2 pcs HCS-5300TD).....	13.30
HCS-852S-8338	Foam Insert (for 4 pcs HCS-8338/HCS-8348/HCS-8335/HCS-8336 series Congress Terminals).....	13.30
HCS-853KS	Transport Cabinet (inner height 15U).....	13.31

HCS-854KS	Portable Multifunctional Storage Case (inner height 299 mm, free fit Foam Insert).....	13.32
HCS-854S-CMU	Foam Insert (for 1 pc main unit with 2U high).....	13.33
HCS-854S-MIC	Foam Insert (for 11 stem microphones).....	13.33
HCS-854S-4338	Foam Insert (for 10 pcs HCS-4338).....	13.34
HCS-854S-4385U	Foam Insert (for 3 pcs HCS-4385U/50 + 4 pcs stem microphones).....	13.34
HCS-854S-4886	Foam Insert (for 3 pcs HCS-4886/87/88 + 4 pcs stem microphones).....	13.35
HCS-854S-5100T	Foam Insert (for 1 pc HCS-5100T).....	13.35
HCS-854S-5300	Foam Insert (for 4 pcs HCS-5300 wireless conference units + 4 pcs stem microphones).....	13.36
HCS-854S-8338	Foam Insert (for 3 pcs HCS-8338/HCS-8348/HCS-8335/HCS-8336 series Congress Terminals).....	13.36

EP-820AS Single Earphone



Features

- Used with the receiver or a conference unit
- Excellent sound quality
- Ø 3.5 mm stereo plug (TRS)
- 32 Ohm (Tip and Sleeve, Ring: NC)
- Frequency response: 50 Hz to 20 kHz
- Sensitivity: ≥102 dBA/1 mW
- Weight: 20 g

Ordering Information

EP-820ASSingle Earphone (TRS connector, Ring: NC)

EP-822 Single Inner Earphone



Features

- Used with the receiver or a conference unit
- Excellent sound quality
- Ø 3.5 mm stereo plug (TRS)
- 16 Ohm (Tip and Sleeve, Ring: NC)
- Frequency response: 20 Hz to 20 kHz
- Sensitivity: ≥90 dBA/1 mW
- Weight: 7 g

Ordering Information

EP-920BSSingle Inner Earphone
(TRS connector, Ring: NC)

EP-829 Single Earphone



Features

- Used with the receiver or a conference unit
- Excellent sound quality
- Earshell is detachable and washable, convenient for cleaning
- Ø 3.5 mm stereo plug (TRS)
- 32 Ohm (Tip and Sleeve, Ring: NC)
- Frequency response: 20 Hz to 20 kHz
- Sensitivity: ≥108 dBA/1 mW
- Weight: 35 g

Ordering Information

EP-829Single Earphone (ear pads can be striped, TRS connector, Ring: NC)

EP-829SW Single Earphone with Switch



Features

- Used with the receiver or a conference unit
- Excellent sound quality
- Built-in magnetic control switch
- Earshell is detachable and washable, convenient for cleaning
- Ø 3.5 mm stereo plug (TRS)
- 32 Ohm (Tip and Sleeve, Ring: NC)
- Frequency response: 20 Hz to 20 kHz
- Sensitivity: ≥108 dBA/1 mW
- Weight: 35 g

Ordering Information

EP-829SWSingle Earphone (ear pads can be striped, built-in magnetic control switch, TRS connector, Ring: NC)

EP-960AN Interpreter Headset with Microphone



Features

- Incorporated with interpreter unit for monitoring and speaking
- Excellent sound quality
- Interpreters can wear the headset according to their habits
- One sided wire, provide better user experience
- Greater headband adjustability, suitable for all the users
- 150 Ohm x 2, Ø 3.5 mm TRRS plug
- Frequency response of headphone: 20 Hz to 20 kHz
- Sensitivity of headphone: ≥108 dBA/1 mW
- Polar pattern of microphone: Omnidirectional
- Frequency response of microphone: 50 Hz to 20 kHz
- Sensitivity of microphone: -48 dBV/Pa
- Impedance of microphone: <680 Ohm
- Weight: 95 g

Ordering Information

EP-960AN.....Interpreter Headset with Microphone (TRRS plug, stereo, for HCS-8385/60, including a pair of EP-960HD Detachable Earshells)

EP-960AH Interpreter Headset with Microphone



Features

- Incorporated with interpreter unit for monitoring and speaking
- Excellent sound quality
- Interpreters can wear the headset according to their habits
- One sided wire, provide better user experience
- Greater headband adjustability, suitable for all the users
- 150 Ohm x 2, Ø 3.5 mm stereo plug (TRS) for headphone
- Ø 3.5 mm stereo plug (TRS, Ring: NC) for microphone
- Frequency response of headphone: 20 Hz to 20 kHz
- Sensitivity of headphone: ≥108 dBA/1 mW
- Polar pattern of microphone: Omnidirectional
- Frequency response of microphone: 50 Hz to 20 kHz
- Sensitivity of microphone: -48 dBV/Pa
- Impedance of microphone: <680 Ohm
- Weight: 109 g

Ordering Information

EP-960AH....Interpreter Headset with Microphone (stereo, for HCS-4385U/50, including a pair of EP-960HD Detachable Earshells)

EP-960BH Interpreter Headset



Features

- Incorporated with interpreter unit for monitoring
- Excellent sound quality
- One sided wire, provide better user experience
- Greater headband adjustability, suitable for all the users
- 150 Ohm × 2, Ø 3.5 mm stereo plug (TRS) for headphone
- Frequency response of headphone: 20 Hz to 20 kHz
- Sensitivity of headphone: ≥108 dBA/1 mW
- Weight: 90 g

Ordering Information

EP-960BH.....Interpreter Headset (stereo, including a pair of EP-960HD Detachable Earshells)

HCS-5100PA Headphone



Features

- Used with the receiver or a conference unit
- Excellent sound quality
- 32 Ohm × 2, Ø 3.5 mm stereo plug (TRS)
- Frequency response: 20 Hz to 20 kHz
- Sensitivity: ≥108 dBA/1 mW
- Weight: 70 g

Ordering Information

HCS-5100PA.....Headphone

EP-960HD Detachable Earshells



Features

- Used for EP-960 series headset
- Earshell is detachable and washable, convenient for cleaning
- Color: black

Ordering Information

EP-960HD.....Detachable Earshells for EP-960 (for EP-960 series headset, 1 pair)

Sponge Ear Pads



Features

- Used for headphone
- 50 pairs per package
- Color: black

Ordering Information

Sponge Ear Pads for HCS-5100PA.....Sponge Ear Pads (thick, for new HCS-5100PA, 50 pairs/package)

EP-960SP-L.....Sponge Ear Pads (Ø 70 mm, for EP-960 series headset, 10 pairs/package)

EP-960SP-S.....Sponge Ear Pads (Ø 58 mm, for EP-960 series headset, 10 pairs/package)

HCS-1020 Clip Microphone



Features

- Stylish and ergonomic design
- Excellent immunity to RF interferences from mobile phones
- Ø 3.5 mm stereo plug with a 1.5-meter cable

Technical Specifications

Electrical

Transducer.....Electret-condenser
 Polar pattern.....Uni-directional
 Operating voltage.....5 VDC
 Sensitivity.....-46 dBA at 680 Ohm (0 dB = 1 V/Pa at 1 kHz)
 Frequency response.....30 Hz to 20 kHz
 Input impedance.....2 kOhm
 Directivity 0°/180°.....> 20 dB (1 kHz)
 Equivalent noise.....20 dBA (SPL)
 Maximum sound pressure level.....125 dB (THD<3%)

Mechanical


Dimensions (h x w x d).....51 x 25 x 13 mm
 Weight.....3 g
 Color.....Black

Ordering Information

HCS-1020.....Clip Microphone

- MS41EGA1G.....Stem Microphone (41 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, charcoal gray)
- MS41EGA1S.....Stem Microphone (41 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, silver)
- MS41EGA1B.....Stem Microphone (41 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, black)
- MS47EGA1G.....Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, charcoal gray)
- MS47EGA1S.....Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, silver)
- MS47EGA1B.....Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100, HCS-5300, HCS-5335 and HCS-8300 series, black)


MSxxEME1 Stem Microphone

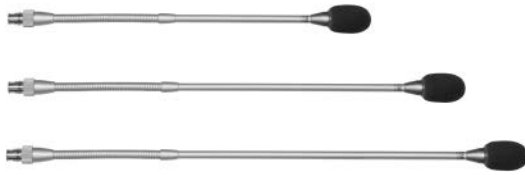


Features

- Broadcast quality microphone
- With two-color illuminated ring (green/red)
- With lockable windshield
- For HCS-3900 series Congress Unit
- 41 cm vision is standard stem microphone for HCS-3900 series Congress Unit (except HCS-3938CF/HCS-3938DF)

Polar pattern

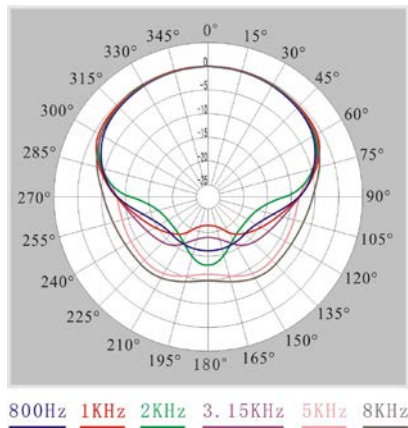

Frequency response

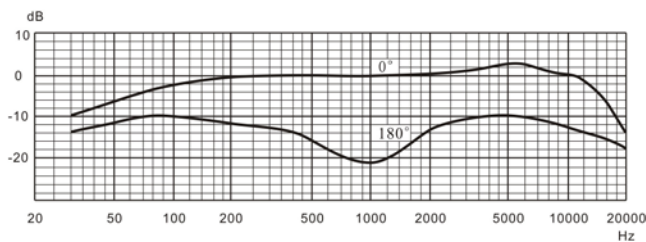

Technical Specifications

Electrical

Transducer..... Electret-condenser
 Polar pattern..... Uni-directional
 Operating voltage..... 5 VDC
 Sensitivity..... -46 dBA at 680 Ohm (0 dB = 1 V/Pa at 1 kHz)
 Frequency response..... 50 Hz to 20 kHz
 Input impedance..... 2 kOhm
 Directivity 0°/180°..... > 20 dB (1 kHz)
 Equivalent noise..... 20 dBA (SPL)
 Maximum sound pressure level..... 125 dB (THD<3%)

Mechanical

Length..... 33 cm, 41 cm, 47 cm
 Weight..... 85 g, 95 g, 105 g
 Color..... Silver (PANTONE 428 C)
 / Charcoal gray (PANTONE 447 C)

Ordering Information

- MS33EME1G..... Stem Microphone (33 cm, with two-color illuminated ring and lockable windshield, for HCS-3900 series, charcoal gray)
- MS33EME1S..... Stem Microphone (33 cm, with two-color illuminated ring and lockable windshield, for HCS-3900 series, silver)
- MS41EME1G..... Stem Microphone (41 cm, with two-color illuminated ring and lockable windshield, for HCS-3900 series, charcoal gray)
- MS41EME1S..... Stem Microphone (41 cm, with two-color illuminated ring and lockable windshield, for HCS-3900 series, silver)
- MS47EME1G..... Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-3900 series, charcoal gray)
- MS47EME1S..... Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-3900 series, silver)

- MS41EMF1B.....Stem Microphone (41 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, black)
- MS47EMF1G.....Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, charcoal gray)
- MS47EMF1S.....Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, silver)
- MS47EMF1B.....Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, black)


MSxxEMF2B Stem Microphone




Features

- With two flexible parts
- Broadcast quality microphone
- With two-color illuminated ring (green/red)
- With lockable windshield
- For HCS-4100/50, HCS-5300 and HCS-8300 series Conference Unit

Polar pattern

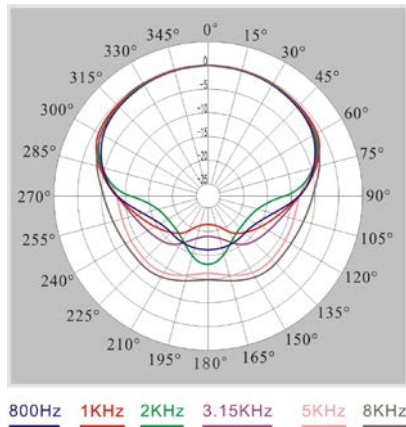

Frequency response

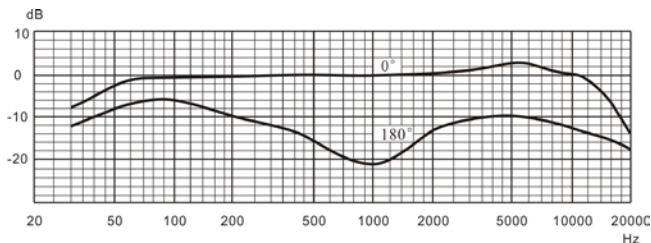

Technical Specifications

Electrical

Transducer..... Electret-condenser
 Polar pattern..... Uni-directional
 Operating voltage..... 5 VDC
 Sensitivity..... -46 dBA at 680 Ohm (0 dB = 1 V/Pa at 1 kHz)
 Frequency response..... 50 Hz to 20 kHz
 Input impedance..... 2 kOhm
 Directivity 0°/180°..... > 20 dB (1 kHz)
 Equivalent noise..... 20 dBA (SPL)
 Maximum sound pressure level..... 125 dB (THD<3%)

Mechanical

Length..... 50 cm, 60 cm, 70 cm
 Color..... Black (PANTONE 419 C)

Ordering Information

- MS50EMF2B..... Stem Microphone (50 cm, 2 flexible parts, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, black)
- MS60EMF2B..... Stem Microphone (60 cm, 2 flexible parts, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, black)
- MS70EMF2B..... Stem Microphone (70 cm, 2 flexible parts, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100/50, HCS-5300 and HCS-8300 series, black)


MS33EMFSS Stem Microphone




Features

- With flexible hose
- Broadcast quality microphone
- With two-color illuminated ring (green/red)
- With lockable windshield
- For HCS-4385U/50

Polar pattern

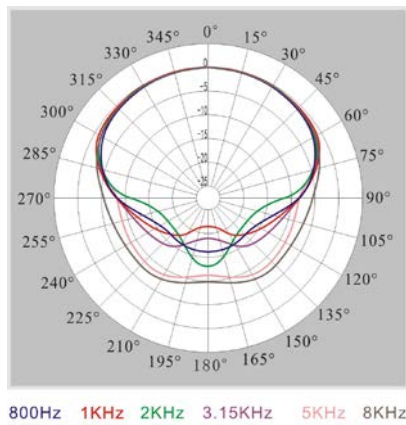

Frequency response

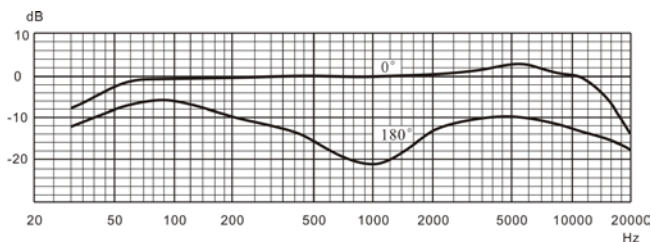

Technical Specifications

Electrical

Transducer.....Electret-condenser
 Polar pattern.....Uni-directional
 Operating voltage.....5 VDC
 Sensitivity.....-46 dBA at 680 Ohm (0 dB = 1 V/Pa at 1 kHz)
 Frequency response.....50 Hz to 20 kHz
 Input impedance.....2 kOhm
 Directivity 0°/180°.....> 20 dB (1 kHz)
 Equivalent noise.....20 dBA (SPL)
 Maximum sound pressure level.....125 dB (THD<3%)

Mechanical

Length.....33 cm
 Color.....Silver (PANTONE 428 C)

Ordering Information

MS33EMFSS.....Stem Microphone (33 cm, flexible hose, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4385U/50, silver)

M-model Windshield - lockable



Features

- Lockable windshield
- For M-model stem microphone
- Optional
- Color: gray (PANTONE 446 C) / black (PANTONE 419 C)

Ordering Information

M-model Lockable Windshield_G....M-model Lockable Windshield (optional, gray)
 M-model Lockable Windshield_B....M-model Lockable Windshield (optional, black)

MIC-SK-V Stem Microphone Fixing Base



Features

- Fix 5P E type stem microphone on the desk
- 6P mini DIN interface with 1.0-meter cable

Technical Specifications

Mechanical

Dimensions (diameter x h).....Ø 50 x 22 mm
 Weight.....0.1 kg
 Color.....Charcoal gray (PANTONE 447 C)

Ordering Information

MIC-SK-V.....Stem Microphone Fixing Base (tabletop)

MIC-SK-H Stem Microphone Fixing Base



Features

- Suspension fix 5P E type stem microphone
- 6P mini DIN interface with 1.0-meter cable

Technical Specifications

Mechanical

Dimensions (h x w x d).....39x49x31 mm
 Weight.....0.1 kg
 Color.....Charcoal gray (PANTONE 447 C)

Ordering Information

MIC-SK-H.....Stem Microphone Fixing Base (suspension)

HCS-ADP5V Power Adapter



Features

- Used for charging HCS-1081/50 wireless E-ink Electronic Nameplate

Technical Specifications

Electrical

Power supply.....AC 100 V - 240 V, 50 Hz / 60 Hz
 Output.....5 V DC, 2.0 A
 Connector.....UL, CE or VDE type, according to the sales area

Mechanical

Cable length.....1 m
 Dimensions (h x w x d).....43 x 39 x 27 mm
 Weight.....50 g
 Color.....White

Ordering Information

HCS-ADP5V.....Power Adapter (5 V DC, 2.0 A, for HCS-1081/50)

CBL2SS 2-pin Cable for Conference System



Features

- Connecting HCS-8300KMX with HCS-8300PM/HCS-8300PM2
- Standard connectors (2P aviation socket at each end)
- Length: 1 m

Ordering Information

CBL2SS-01.....1 m 2-pin Cable (with two sockets)
 CBL2SS-01CMP.....1 m 2-pin Cable (with two sockets, CMP)

CBL4PK Power Adapter Cable



Features

- For HCS-8300PM/HCS-8300PM2/HCS-8300KMX - supplies power to HCS-8338 and HCS-8348 series Paperless Multi-media Congress Terminal
- Standard connectors (a 2P aviation socket at one end and a 4P-DIN socket at the opposite end)
- Length: 1 m

Ordering Information

CBL4PK-01.....1 m Power Adapter Cable (for HCS-8300PM/PM2/KMX, supplies power to HCS-8338, HCS-8348)
 CBL4PK-01CMP.....1 m Power Adapter Cable (for HCS-8300PM/PM2/KMX, supplies power to HCS-8338, HCS-8348, CMP)

CBL4PS 4-pin Extension Cable



Features

- Extension cable for connecting HCS-8338 and HCS-8348 series Paperless Multi-media Congress Terminal
- Standard connectors (a plug at one end and a socket at the opposite end)
- Optional: 5 m, 10 m, 20 m, 30 m, 40 m and 50 m available

Ordering Information

CBL4PS-05CMP.....5 m 4-pin Extension Cable (with a plug and a socket, CMP)
 CBL4PS-10CMP.....10 m 4-pin Extension Cable (with a plug and a socket, CMP)
 CBL4PS-20CMP.....20 m 4-pin Extension Cable (with a plug and a socket, CMP)
 CBL4PS-30CMP.....20 m 4-pin Extension Cable (with a plug and a socket, CMP)
 CBL4PS-40CMP.....20 m 4-pin Extension Cable (with a plug and a socket, CMP)
 CBL4PS-50CMP.....50 m 4-pin Extension Cable (with a plug and a socket, CMP)

4-pin Professional Extension Cable for Conference System



Features

- For embedding system cables
- Conductor: 18AWGx4C

Ordering Information

CBL4C-CMP.....Professional Extension Cable for Conference System (4-pin, 18AWGx4C, CMP)

CBL4PT Power Branch Cable



Features

- Power branch cable for "daisy-chain" supplying power to HCS-8338 and HCS-8348 series Paperless Multi-media Congress Terminal
- Input end: 4P-DIN plug
- Output end: 4P-DIN socket and a DC plug
- Length: 2 m

Ordering Information

CBL4PT-02.....2 m Power Branch Cable (for HCS-8338 and HCS-8348 series Paperless Multi-media Congress Terminal)

CBL4PT-02CMP.....2 m Power Branch Cable (for HCS-8338 and HCS-8348 series Paperless Multi-media Congress Terminal, CMP)

CBL-XLR2DIN-01 XLR to DIN Converting Cable



Functions

- Used for external strong signal accessing to TAIDEN conference system
- XLR connector for external audio source input
- 6P mini DIN connector for connection to the HCS-4340HDA/50P Multi-function Connector
- Microphone On/Off button with illuminated ring
- Length: 1 m

Ordering Information

CBL-XLR2DIN-01.....1 m XLR to DIN Converting Cable (HCS-4340HDA/50P needed)

Professional Extension Cable for Conference System



Features

- For embedding system cables
- Conductor: 4x2x(7x0.2)+96x0.12

Ordering Information

S-UTP CABLE.....Professional Extension Cable for Conference System

FTP CABLE.....Professional Extension Cable for Conference System (CMP)

CBL6PP 6-pin Extension Cable



Features

- Connecting conference main units
- Standard connectors (6P-DIN plug at each end)
- Cable: S-UTP CABLE or FTP CABLE (CMP)
- Cable conductor: 4x2x(7x0.2)+96x0.12
- Length: 2 m
- Used for HCS-3900 series, HCS-4100/50 series and HCS-8300 series

Ordering Information

- CBL6PP-02.....2 m 6-pin Extension Cable (with two plugs)
- CBL6PP-02CMP.....2 m 6-pin Extension Cable (with two plugs, CMP)

CBL6PS 6-pin Extension Cable



Features

- Connecting conference main unit with contribution unit when cable extensions are needed
- Standard connectors (6P-DIN plug and 6P-DIN socket)
- Cable: S-UTP CABLE or FTP CABLE (CMP)
- Cable conductor: 4x2x(7x0.2)+96x0.12
- Optional: 3 m, 5 m, 10 m, 20 m, 30 m, 40 m and 50 m available
- Used for HCS-3900 series, HCS-4100/50 series and HCS-8300 series

Ordering Information

- CBL6PS-01__1 m 6-pin Extension Cable (with a plug and a socket)
- CBL6PS-03__3 m 6-pin Extension Cable (with a plug and a socket)
- CBL6PS-05__5 m 6-pin Extension Cable (with a plug and a socket)
- CBL6PS-10__10 m 6-pin Extension Cable (with a plug and a socket)
- CBL6PS-20__20 m 6-pin Extension Cable (with a plug and a socket)
- CBL6PS-30__30 m 6-pin Extension Cable (with a plug and a socket)
- CBL6PS-40__40 m 6-pin Extension Cable (with a plug and a socket)
- CBL6PS-50__50 m 6-pin Extension Cable (with a plug and a socket)
- CBL6PS-03CMP.....3 m 6-pin Extension Cable (with a plug and a socket, CMP)
- CBL6PS-05CMP.....5 m 6-pin Extension Cable (with a plug and a socket, CMP)
- CBL6PS-10CMP.....10 m 6-pin Extension Cable (with a plug and a socket, CMP)
- CBL6PS-20CMP.....20 m 6-pin Extension Cable (with a plug and a socket, CMP)
- CBL6PS-30CMP.....30 m 6-pin Extension Cable (with a plug and a socket, CMP)
- CBL6PS-40CMP.....40 m 6-pin Extension Cable (with a plug and a socket, CMP)
- CBL6PS-50CMP.....50 m 6-pin Extension Cable (with a plug and a socket, CMP)

CBL5300 Dedicated Transceiver Cable



Features

- Dedicated cable for HCS-5300TD/TDS
- 1 x 6P-DIN male plug
- 1 x 6P-DIN female socket
- Optional: 5 m, 10 m, 20 m, 30 m, 40 m and 50 m available
- Ø 6 mm
- Color: black
- Attention: cable looks identical to CBL6PS but pin-assignment differs!! Please do not mix up!

Ordering Information

CBL5300-05	5 m Dedicated Transceiver Cable
CBL5300-10	10 m Dedicated Transceiver Cable
CBL5300-20	20 m Dedicated Transceiver Cable
CBL5300-30	30 m Dedicated Transceiver Cable
CBL5300-40	40 m Dedicated Transceiver Cable
CBL5300-50	50 m Dedicated Transceiver Cable
CBL5300-05CMP	5 m Dedicated Transceiver Cable (CMP)
CBL5300-10CMP	10 m Dedicated Transceiver Cable (CMP)
CBL5300-20CMP	20 m Dedicated Transceiver Cable (CMP)
CBL5300-30CMP	30 m Dedicated Transceiver Cable (CMP)
CBL5300-40CMP	40 m Dedicated Transceiver Cable (CMP)
CBL5300-50CMP	50 m Dedicated Transceiver Cable (CMP)

Coaxial-cable



Features

- Equivalent impedance: 75 Ohm
- Ø 5 mm (RG-59)
- Ø 7 mm (RG-6/U)
- Length of per roll: 300 meter

Ordering Information

RG-59	Coaxial-cable (75 Ω)
RG-6/U	Coaxial-cable (75 Ω)

BNC Connector



Features

- Used to connect HCS-5100M and HCS-5100T or between HCS-5100T
- Used with Coaxial-cable

Ordering Information

BNC Connector	BNC Connector (plug)
---------------	-------	----------------------

HCS-4352T/50 6-pin Cable Splitter



Features

- Relay facility, amplification of the communication signals
- 6P-DIN interfaces, "1 in / 3 out " structure for connection
- 2m-cable with a 6P-DIN connector at the input end
- Three 6PIN output interfaces, can drive 70-meter long extension cable

Ordering Information

HCS-4352T/50.....6-pin Cable Splitter (1 input & 3 outputs, for HCS-4100/50 and HCS-8300 series)

HCS-4353/06 6-pin Grounding Cable Connection Socket



Features

- For embedding cables to connect conference unit
- For connecting to HCS-3900 series, HCS-4100/50 series or HCS-8300 series conference unit
- Interface: 2 × 6P-DIN female socket
- The circuit ground pin of the socket is isolated from the protective earth

Ordering Information

HCS-4353/06.....6-pin Grounding Cable Connection Socket (for HCS-3900, HCS-4100/50 and HCS-8300 series)

Detachable 4P-DIN Standard Plug



Features

- For soldering to 4P-DIN cable
- Removable DIN standard male connector (4PIN)

Ordering Information

4P-DIN plug.....Detachable 4P-DIN Standard Plug

Solderable 4P-DIN Standard Socket



Features

- For soldering to 4P-DIN cable
- Solderable 4P-DIN female socket with insulated isolation
- The circuit ground pin of the socket is isolated from the protective earth

Ordering Information

4P-DIN socket.....Solderable 4P-DIN Standard Socket (insulating)

Detachable 6P-DIN Standard Plug



Features

- For soldering to 6P-DIN cable
- Removable DIN standard male connector (6PIN)

Ordering Information

6P-DIN plug.....Detachable 6P-DIN Standard Plug

Solderable 6P-DIN Standard Socket



Features

- For soldering to 6P-DIN cable
- Solderable 6P-DIN female socket with insulated isolation
- The circuit ground pin of the socket is isolated from the protective earth

Ordering Information

6P-DIN socket.....Solderable 6P-DIN Standard Socket (insulating)

HCS-4345TK/50 Touched IC-Card Encoder



Features

- Encoding unit to produce the touched IC-Card. The IC-Card may be used to grant access to a sign-in system
- PC connection via type A USB interface
- Smart design

Technical Specifications

Interconnections

- Type A USB interface for connection to computer

Mechanical

Mounting.....Tabletop
 Dimensions (h x w x d).....66 x 84 x 121 mm
 Weight.....0.2 kg
 Color.....Champagne panel (PANTONE 401 C)
 + gray base (PANTONE 424 C)

Ordering Information

HCS-4345TK/50.....Touched IC-Card Encoder
 (champagne panel + gray base)

**HCS-852KS
Multifunctional Storage Case**



Features

- Used for storing and transporting TAIDEN series products

Technical Specifications

Mechanical

Dimensions h x w x d (mm)
 Outside 890 x 760 x 590
 Inside 620 x 705 x 535
 Net weight 31.0 kg
 Color Blue

Ordering Information

HCS-852KS... Multifunctional Storage Case (inner height 620 mm, free fit Foam Insert, holds up to 24 stem microphones in the case cover)

**HCS-852S-CMU
Foam Insert**



Features

- Used to secure Conference System Main Unit and Extension Cable
- Stores up to 1 pc main unit with 2U high + 20-meter extension cable

Technical Specifications

Mechanical

Dimensions h x w x d (mm) 118 x 700 x 530
 Net weight 1.0 kg
 Color Black

Ordering Information

HCS-852S-CMU Foam Insert (for 1 pc main unit with 2U high+ 20 m extension cable)

**HCS-852S-DStyle
Foam Insert**



Features

- Used to secure HCS-4330/32 congress units and stem microphones
- Stores up to 12 pcs HCS-4330/32 congress units + 8 pcs stem microphones

Technical Specifications

Mechanical

Dimensions h x w x d (mm) 100 x 700 x 530
 Net weight 0.9 kg
 Color Black

Ordering Information

HCS-852S-Dstyle Foam Insert (for 12 pcs HCS-4330/32 + 8 pcs stem microphones)

**HCS-852S-GStyle
Foam Insert**



Features

- Used to secure HCS-4886/87/88 congress units and stem microphones
- Stores up to 10 pcs HCS-4886/87/88 congress units + 6 pcs stem microphones

Technical Specifications

Mechanical

Dimensions h x w x d (mm) 150 x 700 x 530
 Net weight 1.0 kg
 Color Black

Ordering Information

HCS-852S-Gstyle Foam Insert (for 10 pcs HCS-4886/87/88 + 6 pcs stem microphones)

**HCS-852S-1U
Foam Insert**



Features

- Used to secure 2 pcs devices of 1U height and attached cables
- Stores up to 2 pcs devices of 1U height and attached cables

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....55 x 700 x 530
 Net weight.....0.7 kg
 Color.....Black

Ordering Information

HCS-852S-1U.....Foam Insert (for 2 pcs devices of 1U height and attached cables)

**HCS-852S-4338
Foam Insert**



Features

- Used to secure HCS-3638/HCS-4338/HCS-3938 conference units, stem microphones and attached cables
- Stores up to 16 pcs HCS-3638/HCS-4338/HCS-3938 conference units + 10 pcs stem microphones + attached cables

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....150 x 700 x 530
 Net weight.....1.0 kg
 Color.....Black

Ordering Information

HCS-852S-4338.....Foam Insert (for 16 pcs HCS-3638/HCS-4338/HCS-3938 + 10 pcs stem microphones + attached cables)

**HCS-852S-4385U
Foam Insert**



Features

- Used to secure HCS-4385U/50 interpreter units and stem microphones
- Stores up to 6 pcs HCS-4385U/50 interpreter units + 2 pcs stem microphones

Technical Specifications

Mechanical

Dimensions h x w x d (mm)100 x 700 x 530
 Net weight0.9 kg
 ColorBlack

Ordering Information

HCS-852S-4385UFoam Insert (for 6 pcs HCS-4385U/50 + 2 pcs stem microphones)

**HCS-852S-5100T
Foam Insert**



Features

- Used to secure HCS-5100T Digital Infrared Radiator and HCS-4385U/50 Interpreter Units
- Stores up to 1 pc HCS-5100T + 2 pcs HCS-4385U/50

Technical Specifications

Mechanical

Dimensions h x w x d (mm)200 x 700 x 530
 Net weight1.6 kg
 ColorBlack

Ordering Information

HCS-852S-5100TFoam Insert (for 1 pc HCS-5100T + 2 pcs HCS-4385U/50)

**HCS-852S-5300CHG
Foam Insert**



Features

- Used to secure HCS-5300CHG/08 Charging Units
- Stores up to 2 pcs HCS-5300CHG/08

Technical Specifications

Mechanical

Dimensions h x w x d (mm) 100 x 700 x 530
 Net weight 1.0 kg
 Color Black

Ordering Information

HCS-852S-5300CHG Foam Insert (for 2 pcs HCS-5300CHG/08)

**HCS-852S-5300D
Foam Insert**



Features

- Used to secure HCS-5300 Series Digital Infrared Wireless Conference Units
- Stores up to 8 pcs HCS-5300 Digital Infrared Wireless Conference Units

Technical Specifications

Mechanical

Dimensions h x w x d (mm) 100 x 700 x 530
 Net weight 1.0 kg
 Color Black

Ordering Information

HCS-852S-5300D Foam Insert (for 8 pcs HCS-5300 wireless conference units)

**HCS-852S-5300TD
Foam Insert**



Features

- Used to secure HCS-5300CHG/08 Charging Unit and HCS-5300TD Digital Infrared Transceiver
- Stores up to 1 pc HCS-5300CHG/08 + 2 pcs HCS-5300TD

Technical Specifications


Mechanical

Dimensions h x w x d (mm)100 x 700 x 530
 Net weight1.0 kg
 ColorBlack

Ordering Information

HCS-852S-5300TD.....Foam Insert (for 1 pc HCS-5300CHG/08 + 2 pcs HCS-5300TD)

**HCS-852S-8338
Foam Insert**

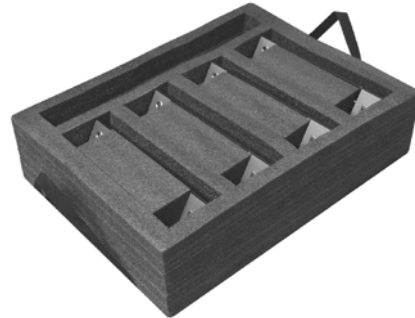

Features

- Used to secure HCS-8338/HCS-8335 Multimedia Congress Terminals
- Stores up to 4 pcs HCS-8338/HCS-8335 Multimedia Congress Terminals

Technical Specifications

Mechanical

Dimensions h x w x d (mm) 178 x 700 x 530
 Net weight 1.2 kg
 ColorBlack

Ordering Information

HCS-852S-8338.....Foam Insert (for 4 pcs HCS-8338/HCS-8348/HCS-8335/HCS-8336 series Congress Terminals)

HCS-853KS Transport Cabinet



Features

- Used for storing and transporting TAIDEN series main units

Technical Specifications

Mechanical

Dimensions h x w x d (mm) 890 x 590 x 545
 Net weight 33.7 kg
 Color Blue

Ordering Information

HCS-853KS Transport Cabinet (inner height 15U)

HCS-854KS

Portable Multifunctional Storage Case



Features

- Used for storing and transporting TAIDEN series products

Technical Specifications

Mechanical

Dimensions h x w x d (mm)

Outside.....338 x 663 x 496

Inside.....299 x 575 x 406

Net weight.....10.5 kg

Color.....Black

Ordering Information

HCS-854KS.....Portable Multifunctional Storage Case
(inner height 299 mm, free fit Foam Insert)



**HCS-854S-CMU
Foam Insert**



Features

- Used to secure Conference System Main Unit
- Stores up to 1 pc main unit with 2U high

Technical Specifications

Mechanical

Dimensions h x w x d (mm) 118 x 573 x 408
 Net weight 0.6 kg
 Color Black

Ordering Information

HCS-854S-CMU.....Foam Insert (for 1 pc main unit with 2U high)

**HCS-854S-MIC
Foam Insert**



Features

- Used to secure stem microphones
- Stores up to 11 pcs stem microphones

Technical Specifications

Mechanical

Dimensions h x w x d (mm) 55 x 573 x 408
 Net weight 0.6 kg
 Color Black

Ordering Information

HCS-854S-MIC.....Foam Insert (for 11 pcs stem microphones)

**HCS-8524S-4338
Foam Insert**



Features

- Used to secure HCS-3638/HCS-4338 conference units
- Stores up to 10 pcs HCS-3638/HCS-4338 conference units

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....120 x 573 x 408
 Net weight.....0.7 kg
 Color.....Black

Ordering Information

HCS-854S-4338.....Foam Insert (for 10 pcs HCS-3638/HCS-4338)

**HCS-854S-4385U
Foam Insert**



Features

- Used to secure HCS-4385U/50 interpreter units and stem microphones
- Stores up to 3 pcs HCS-4385U/50 interpreter units + 4 pcs stem microphones

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....98 x 573 x 408
 Net weight.....0.6 kg
 Color.....Black

Ordering Information

HCS-854S-4385U.....Foam Insert (for 3 pcs HCS-4385U/50 + 4 pcs stem microphones)

**HCS-854S-4886
Foam Insert**



Features

- Used to secure HCS-4886/87/88 congress units and stem microphones
- Stores up to 3 pcs HCS-4886/87/88 congress units + 4 pcs stem microphones

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....98 x 573 x 408
 Net weight.....0.7 kg
 Color.....Black

Ordering Information

HCS-854S-4886.....Foam Insert (for 3 pcs HCS-4886/87/88 + 4 pcs stem microphones)

**HCS-854S-5100T
Foam Insert**



Features

- Used to secure HCS-5100T Digital Infrared Radiator
- Stores up to 1 pc HCS-5100T

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....178 x 573 x 408
 Net weight.....0.9 kg
 Color.....Black

Ordering Information

HCS-854S-5100T.....Foam Insert (for 1 pc HCS-5100T)

**HCS-854S-5300
Foam Insert**



Features

- Used to secure HCS-5300 wireless conference units and stem microphones
- Stores up to 4 pcs HCS-5300 wireless conference units + 4 pcs stem microphones

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....98 x 573 x 408
 Net weight.....0.7 kg
 Color.....Black

Ordering Information

HCS-854S-5300.....Foam Insert (for 4 pcs HCS-5300 wireless conference units + 4 pcs stem microphones)

**HCS-854S-8338
Foam Insert**



Features

- Used to secure HCS-8338/HCS-8335 Multimedia Congress Terminals
- Stores up to 3 pcs HCS-8338/HCS-8335 Multimedia Congress Terminals

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....178 x 573 x 408
 Net weight.....0.8 kg
 Color.....Black

Ordering Information

HCS-854S-8338.....Foam Insert (for 3 pcs HCS-8338/HCS-8348/HCS-8335/HCS-8336 series Congress Terminals)